


Ref.	Unit	Description
1000	Pair	Drum 8ft—two screws
		<p>Standard lift drum Maximum door height:2440mm; Maximum door weight:240kg; Maximum cable diameter:3mm; Diameter shaft:25,4mm;</p> <p>标准平轮 最大提升高度：2440mm 运转时的承载量：240kgs 适用于钢丝绳最大直径：3mm 适用于 25.4mm 外径的轴杆</p>

1001	Pair	Drum 9ft—two screws
		<p>Standard lift drum Maximum door height: 2700mm; Maximum door weight: 240 kg; Maximum cable diameter:3 mm; Diameter shaft: mm;</p> <p>标准平轮 最大提升高度：2700mm 运转时的承载量：240kgs 适用于钢丝绳最大直径:3mm 适用于 25.4mm 外径的轴杆</p>

1002	Pair	Drum 10'ft—two screws
		<p>Standard lift drum Maximum door height: mm:3000mm Maximum door weight: kg:240 kgs Maximum cable diameter: mm:3mm Diameter shaft: mm;</p> <p>标准平轮 最大提升高度：3000mm 运转时的承载量：240 kgs 适用于钢丝绳最大直径：3mm 适用于 25.4mm 外径的轴杆</p>

1003	Pair	Drum 12''ft—two screw	 <p>126×86 mm</p>	<p>Standard lift drum Maximum door height:3650mm; Maximum door weight:340kg; Maximum cable diameter:4mm; Diameter shaft:25,4mm;</p> <p>标准平轮 最大提升高度：3650mm 运转时的承载量：340kg 适用于钢丝绳最大直径：4mm 适用于 25.4mm 外径的轴杆</p>
------	------	-----------------------	--	---

1004	Pair	Drum 13''ft—two screw	 <p>126×86 mm</p>	<p>Standard lift drum Maximum door height:3965mm; Maximum door weight:320kg; Maximum cable diameter:4mm; Diameter shaft:25,4mm;</p> <p>标准平轮 最大提升高度：3965mm 运转时的承载量：320kg 适用于钢丝绳最大直径：4mm 适用于 25.4mm 外径的轴杆</p>
------	------	-----------------------	---	---

1005	Pair	Drum 18''ft—two screw	 <p>152×97 mm</p>	<p>Standard lift drum Maximum door height:5500mm; Maximum door weight:680kg; Maximum cable diameter:5mm; Diameter shaft:25,4mm;</p> <p>标准平轮 最大提升高度：5500mm 运转时的承载量：680kg 适用于钢丝绳最大直径：5mm 适用于 25.4mm 外径的轴杆</p>
------	------	-----------------------	--	---

1006	Pair	Drum 32"ft—two screw
		
<p>Standard lift drum Maximum door height:9750mm; Maximum door weight:700kg; Maximum cable diameter:6mm; Diameter shaft:25.4mm;</p> <p>标准平轮 最大提升高度：9750mm 运转时的承载量：700kg 适用于钢丝绳最大直径：6mm 适用于 25.4mm 外径的轴杆</p>		

1006-125	Pair	Drum 32"ft-125—two screw
		
<p>Standard lift drum Maximum door height:9750mm; Maximum door weight:700kg; Maximum cable diameter:6mm; Diameter shaft:31.75mm;</p> <p>标准平轮 最大提升高度：9750mm 运转时的承载量：700kg 适用于钢丝绳最大直径：6mm 适用于 31.75mm 外径的轴杆</p>		


1100	Pair	Drum 4-54HL—two screw
		
<p>Hilift drum Maximum hilift: 1375mm Maximum door height:1375+2900=4275mm; Maximum door weight:250kg; Maximum cable diameter:4mm; Diameter shaft:25,4mm;</p> <p>半塔轮 垂直提升高度：1375mm 最大提升高度：4275mm 运转时的承载量：250kg 适用于钢丝绳最大直径：4mm 适用于 25.4mm 外径的轴杆</p>		

1101	Pair	Drum5-54HL—two screw
 <p style="text-align: right;">188×99 mm</p>		
<p>Hilift drum Maximum hlift:1370mm Maximum door height:1370+4800=6170mm; Maximum door weight:500kg; Maximum cable diameter:5mm; Diameter shaft:25,4mm;</p> <p>半塔轮 垂直提升高度：1370 mm 最大提升高度：6170 mm 运转时的承载量：500kg 适用于钢丝绳最大直径：5mm 适用于 25.4mm 外径的轴杆</p>		

1102	Pair	Drum 120HL—two screw
 <p style="text-align: right;">238×101 mm</p>		
<p>Hilift drum Maximum hlift:3050mm Maximum door height:3050+3810=6860mm; Maximum door weight:450kg; Maximum cable diameter:5mm; Diameter shaft:25,4mm;</p> <p>半塔轮 垂直提升高度：3050 mm 最大提升高度：6860 mm 运转时的承载量：450kg 适用于钢丝绳最大直径：5mm 适用于 25.4mm 外径的轴杆</p>		

1103	Pair	Drum 164HL—two screw
 <p style="text-align: right;">280×152 mm</p>		
<p>Hilift drum Maximum hlift:4165mm Maximum door height:4165+6000=10165mm; Maximum door weight:575kg; Maximum cable diameter:6mm; Diameter shaft:25,4mm;</p> <p>半塔轮 垂直提升高度：4165 mm 最大提升高度：10165 mm 运转时的承载量：575kg 适用于钢丝绳最大直径：6mm 适用于 25.4mm 外径的轴杆</p>		

1103-125 | Pair | Drum164HL-125—two screw

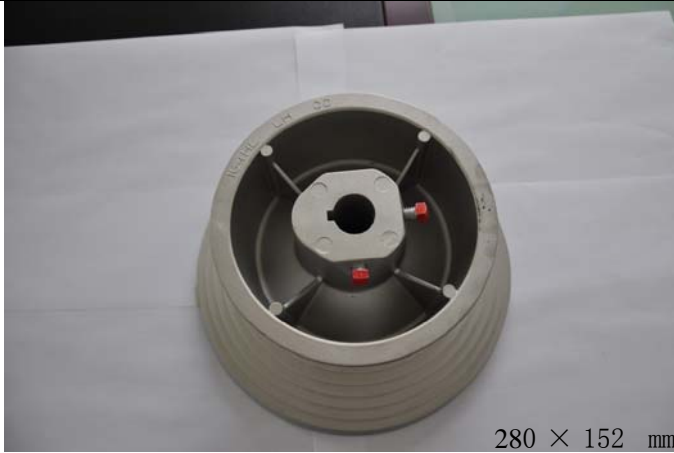

mm

Hilift drum
Maximum hilift
Maximum door height:4165+6000=10165mm;
Maximum door weight:575kg;
Maximum cable diameter:6mm;
Diameter shaft:31.75mm;

半塔轮
垂直提升高度：4165 mm
最大提升高度：10165 mm
运转时的承载量：575kg
适用于钢丝绳最大直径：6mm
适用于 31.75mm 外径的轴杆

1200 | Pair | Drum 11VL—two screw



Vertical lift drum
Maximum door height:3350mm;
Maximum door weight:500kg;
Maximum cable diameter:5mm;
Diameter shaft:25,4mm;

塔轮
最大提升高度：3350 mm
运转时的承载量：500 kg
适用于钢丝绳最大直径：5 mm
适用于 25.4mm 外径的轴杆


1201 | Pair | Drum18VL—two screw



Vertical lift drum
Maximum door height:5480mm;
Maximum door weight:500kg;
Maximum cable diameter:5mm;
Diameter shaft:25,4mm;


塔轮
最大提升高度：5480 mm
运转时的承载量：500 kg
适用于钢丝绳最大直径：5 mm
适用于 25.4mm 外径的轴杆


1201-125	Pair	Drum 18VL-125—two screw
		
<p>Vertical lift drum Maximum door height:5480mm; Maximum door weight:500kg; Maximum cable diameter:5mm; Diameter shaft:31,75mm;</p> <p>塔轮 最大提升高度： 5480 mm 运转时的承载量： 500 kg 适用于钢丝绳最大直径： 5 mm 适用于 31.75mm 外径的轴杆</p>		

1202	Pair	Drum 28VL—two screw
		
<p>Vertical lift drum Maximum door height:8540mm; Maximum door weight:750kg; Maximum cable diameter:6mm; Diameter shaft:25,4mm;</p> <p>塔轮 最大提升高度： 8540 mm 运转时的承载量： 750 kg 适用于钢丝绳最大直径： 6 mm 适用于 25.4mm 外径的轴杆</p>		

1202-125	Pair	Drum 28VL-125—two screw
		
<p>Vertical lift drum Maximum door height:8540mm; Maximum door weight:750kg; Maximum cable diameter:6mm; Diameter shaft:31,75mm;</p> <p>塔轮 最大提升高度： 8540 mm 运转时的承载量： 750 kg 适用于钢丝绳最大直径： 6 mm 适用于 31.75mm 外径的轴杆</p>		

2000U	Pair	Spring fittings1-3/4"U	
		<p>Spring fittings 50 mm For shaft 25.4mm A pair includes -1 universal winding cone -1 universal stationary cone</p> <p>适用于 50 mm 内径的弹簧; 适用于 25.4mm 外径的轴杆</p>	

2001U	Pair	Spring fittings2"U	
		<p>Spring fittings 50 mm For shaft 25.4mm A pair includes -1 universal winding cone -1 universal stationary cone</p> <p>适用于 50mm 内径的弹簧; 适用于 25.4mm 外径的轴杆</p>	

2002U	Set	Spring fittings2-5/8"U	
		<p>Spring fittings 67mm For shaft 25.4mm A pair includes -1 universal winding cone -1 universal stationary cone</p> <p>适用于 67mm 内径的弹簧; 适用于 25.4mm 外径的轴杆</p>	

2002U-4KW	Pair	Spring fittings 2-5/8"U-4KW	
		<p>Spring fittings 67mm For shaft 25.4mm A pair includes -1 universal winding cone -1 universal stationary cone</p> <p>适用于 67mm 内径的弹簧； 适用于 25.4mm 外径的轴杆</p>	Diam.67m



2003U	Pair	Spring fittings 3-3/4"U	
		<p>Spring fittings 95 mm Universal left and right For shaft 25.4mm A pair includes -1 universal winding cone -1 universal stationary cone</p> <p>适用于 95mm 内径的弹簧； 适用于 25.4mm 外径的轴杆</p>	Diam.95m

2003U-125	Pair	Spring fittings 3-3/4"U-125	
		<p>Spring fittings 95 mm Universal left and right For shaft 31.75mm A pair includes -1 universal winding cone -1 universal stationary cone</p> <p>适用于 95mm 内径的弹簧； 适用于 31.75mm 外径的轴杆</p>	Diam.95m

2003U—4KW	Pair	Spring fittings 3-3/4"U-4KW
		<p>Spring fittings 95 mm Universal left and right For shaft 25.4mm A pair includes -1 universal winding cone -1 universal stationary cone</p> <p>适用于 95mm 内径的弹簧； 适用于 25.4mm 外径的轴杆</p>

2003NU	Set	Spring fittings 3-3/4"NU
		<p>Spring fittings 95 mm Universal left and right For shaft 25.4mm The set includes -1 winding cone left -1 winding cone right -1 stationary cone left -1 stationary cone right</p> <p>适用于 95mm 内径的弹簧； 适用于 25.4mm 外径的轴杆</p>

2003NU—4KW	Set	Spring fittings 3-3/4"-4KW--NU
		<p>Spring fittings 95 mm Universal left and right For shaft 25.4mm The set includes -1 winding cone left -1 winding cone right -1 stationary cone left -1 stationary cone right</p> <p>适用于 95mm 内径的弹簧； 适用于 25.4mm 外径的轴杆</p>

2004U	Set	Spring fittings 6''--NU
		<p>Spring fittings 152mm For shaft 25.4mm The set includes</p> <ul style="list-style-type: none"> -1 winding cone left -1 winding cone right -1 stationary cone left -1 stationary cone right <p>适用于 152mm 内径的弹簧； 适用于 25.4mm 外径的轴杆</p> <p>Diam.152m</p>

2004U-125	Set	Spring fittings 6''-125--NU
		<p>Spring fittings 152mm For shaft 31.75mm The set includes</p> <ul style="list-style-type: none"> -1 winding cone left -1 winding cone right -1 stationary cone left -1 stationary cone right <p>适用于 152mm 内径的弹簧； 适用于 31.75mm 外径的轴杆</p> <p>Diam.152m</p>

2004U-4KW	Set	Spring fittings 6''-4KW-NU
		<p>Spring fittings 152mm For shaft 25.4mm The set includes</p> <ul style="list-style-type: none"> -1 winding cone left -1 winding cone right -1 stationary cone left -1 stationary cone right <p>适用于 152mm 内径的弹簧； 适用于 25.4mm 外径的轴杆</p> <p>Diam.152m</p>

2004U-125-4KW	Set	Spring fittings 6'-125-4KW'-NU
		<p>Spring fittings 152mm For shaft 31.75mm The set includes -1 winding cone left -1 winding cone right -1 stationary cone left -1 stationary cone right</p> <p>适用于 152mm 内径的弹簧; 适用于 31.75mm 外径的轴杆</p>
		Diam.152m

3000	Pair	Drum8.0ft—three screw
	<p>Standard lift drum Maximum door height:2440mm; Maximum door weight:240kg; Maximum cable diameter:3mm; Diameter shaft:25,4mm;</p> <p>标准平轮 最大提升高度：2440 mm 运转时的承载量：240 kg 适用于钢丝绳最大直径：3 mm 适用于 25.4mm 外径的轴杆</p>	
		124×46 mm


3003	Pair	Drum12''ft—three screw
	<p>Standard lift drum Maximum door height:3650mm; Maximum door weight:340kg; Maximum cable diameter:4mm; Diameter shaft:25,4mm;</p> <p>标准平轮 最大提升高度：3650 mm 运转时的承载量：340 kg 适用于钢丝绳最大直径：4 mm 适用于 25.4mm 外径的轴杆</p>	
		126×86 mm


3005	Pair	Drum18"ft—three screw	<p>Standard lift drum Maximum door height:5500mm; Maximum door weight:680kg; Maximum cable diameter:5mm; Diameter shaft:25,4mm;</p> <p>标准平轮 最大提升高度： 5500 mm 运转时的承载量： 680kg 适用于钢丝绳最大直径： 5 mm 适用于 25.4mm 外径的轴杆</p>
 <p data-bbox="496 703 635 725">152×97 mm</p>			

3101	Pair	Drum5-54HL—three screw	<p>Hilift drum Maximum hilift:1370mm Maximum door height:1370+4800=6170mm; Maximum door weight:500kg; Maximum cable diameter:5mm; Diameter shaft:25,4mm;</p> <p>半塔轮 垂直提升高度： 1370 mm 最大提升高度： 6170 mm 运转时的承载量： 500 kg 适用于钢丝绳最大直径： 5 mm 适用于 25.4mm 外径的轴杆</p>
 <p data-bbox="523 1615 662 1637">188×99 mm</p>			

3102	Pair	Drum120HL—three screw
 <p data-bbox="491 701 651 730">238×101 mm</p>		<p data-bbox="694 219 826 246">Hilift drum</p> <p data-bbox="694 248 943 275">Maximum hilift:3050</p> <p data-bbox="694 277 1209 304">Maximum door height:3050+3810=6860mm;</p> <p data-bbox="694 306 1042 333">Maximum door weight:450kg;</p> <p data-bbox="694 336 1058 362">Maximum cable diameter:5mm;</p> <p data-bbox="694 365 970 392">Diameter shaft:25,4mm;</p> <p data-bbox="694 506 778 533">半塔轮</p> <p data-bbox="694 535 999 562">垂直提升高度：3050 mm</p> <p data-bbox="694 564 999 591">最大提升高度：3860 mm</p> <p data-bbox="694 593 999 620">运转时的承载量：450 kg</p> <p data-bbox="694 622 1070 649">适用于钢丝绳最大直径：5 mm</p> <p data-bbox="694 651 1027 678">适用于 25.4mm 外径的轴杆</p>

3200	Pair	Drum11VL—three screw
 <p data-bbox="491 1671 651 1700">218×80 mm</p>		<p data-bbox="694 1189 890 1216">Vertical lift drum</p> <p data-bbox="694 1218 1062 1245">Maximum door height:3350mm;</p> <p data-bbox="694 1247 1038 1274">Maximum door weight:500kg;</p> <p data-bbox="694 1276 1054 1303">Maximum cable diameter:5mm;</p> <p data-bbox="694 1305 970 1332">Diameter shaft:25,4mm;</p> <p data-bbox="694 1447 751 1473">塔轮</p> <p data-bbox="694 1476 999 1503">最大提升高度：3350 mm</p> <p data-bbox="694 1505 999 1532">运转时的承载量：500 kg</p> <p data-bbox="694 1534 1070 1561">适用于钢丝绳最大直径：5 mm</p> <p data-bbox="694 1563 1027 1590">适用于 25.4mm 外径的轴杆</p>

3201	Pair	Drum18VL—three screw
 <p style="text-align: right;">284×105 mm</p>		
<p>Vertical lift drum Maximum door height:5480mm; Maximum door weight:500kg; Maximum cable diameter:5mm; Diameter shaft:25,4mm;</p> <p>塔轮 最大提升高度：5480 mm 运转时的承载量：500 kg 适用于钢丝绳最大直径：5 mm 适用于 25.4mm 外径的轴杆</p>		

3201-125	Pair	Drum18VL125—three screw
 <p style="text-align: right;">284×105 mm</p>		
<p>Vertical lift drum Maximum door height:5480mm; Maximum door weight:500kg; Maximum cable diameter:5mm; Diameter shaft:31.75mm;</p> <p>塔轮 最大提升高度：5480 mm 运转时的承载量：500 kg 适用于钢丝绳最大直径：5 mm 适用于 31.75mm 外径的轴杆</p>		